

## 10" ROUND MOFLOW<sup>™</sup> SUCTION OUTLET COVER AND MUD FRAME

## **VGB** Series

## **FEATURES**

For single or multiple drain use 3" sump depth / min. 2" pipe (see installation instructions)

Single -Floor: 158 GPM at 1.6 fps Wall: 162 GPM at 1.7 fps

Floor/wall: 146.3 GPM at 1.5 fps Floor/wall: 97.6 GPM at 1.0 fps

31.3 square inch opening

Additional sump versions also available

#316 stainless steel screws


Manufactured from superior UV-resistant engineered polymers

Meets or exceeds ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing

Replace every five years from the date ofinstallation

8 per case

The AquaStar line of suction outlet covers, compliant with the Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 and NSF/ANSI 50-2009a)

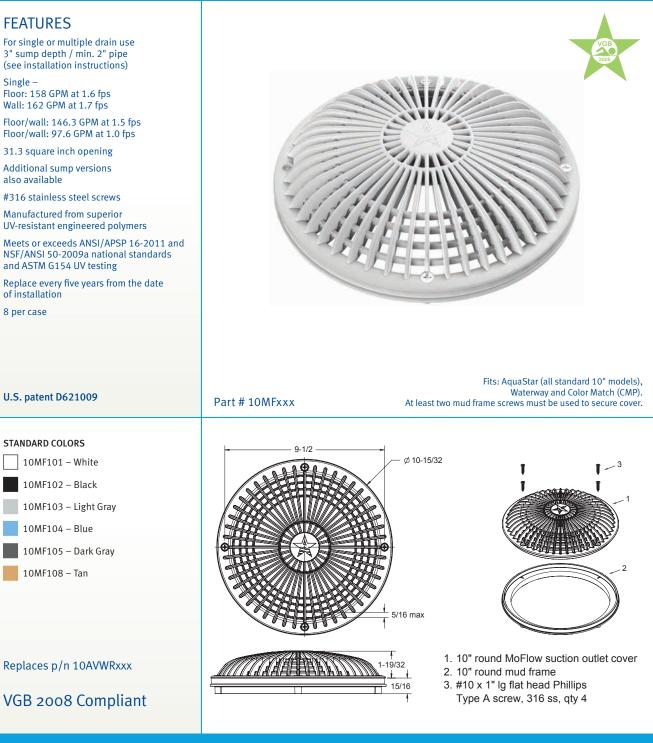

P 877-768-2717 F 877-276-POOL Outside the US: P +1-805-620-5060 F +1-949-336-1940 info@aquastarpoolproducts.com www.aquastarpoolproducts.com



## ADDITIONAL PRODUCT CONFIGURATIONS FOR 10MFXXX



